
A ladder for all purposes...

...the **WAKÜ Telescopic Ladder**

This is a ladder design with telescopic stile extension. This internationally approved design has many advantages:



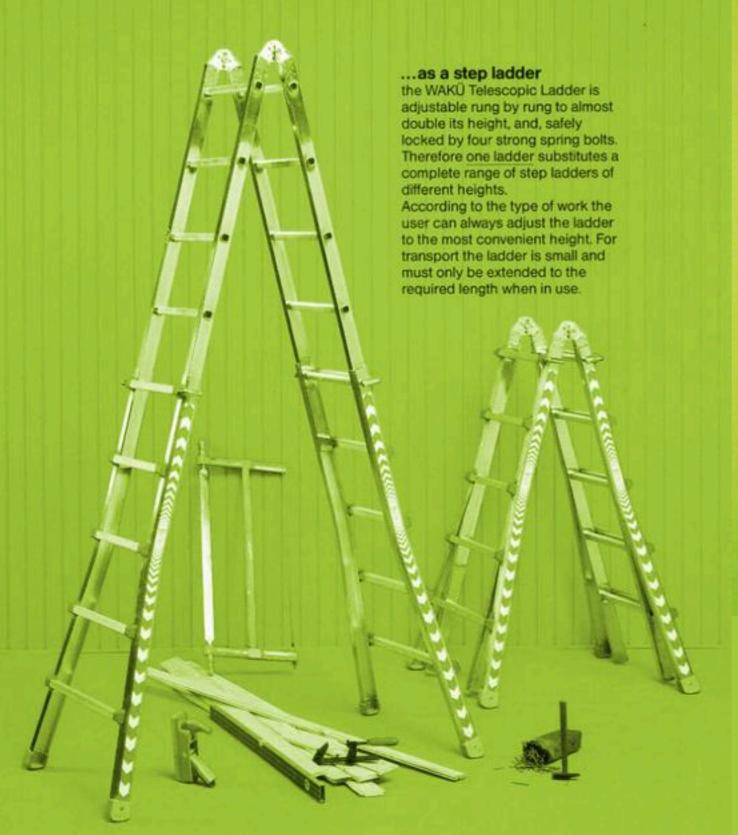

Useful attachments:

Hook-on-platform This platform can be attached to any rung. Easy access up and down the ladder by pushing the top plate inwards, then pushing



the platform outward into working position. Large area to stand on for safety and comfort. Also to be used as a handy platform to deposit baskets or tools.



Extra leg extension Variable height adjustment for the individual ladder leg when used on winding staircases or as a lean-to-ladder on slopes.



the uppermost ladder rung, which otherwise would be too close to the wall. With greater distance, work becomes easier and, at the same time, your working utensils are readily available on the grid.

Rungs and stiles of the WAKU Telescopic Ladder are made from high stregth aluminium profiles. This guarantees a ladder of great stability and also comfortabl light.

weight.

This ingenious ladder is available in 4 sizes:

WAKÚ Telescopic Ladder	Type 100	Type 101	Type 102	Type 103
Transport size	3 rungs	4 rungs	5 rungs	6 rungs
(fold-away size)	1.02 m	1.29 m	1.57 m	1.85 m
Step ladder				
height adjustable from	3-5 rungs	4-7 rungs	5-9 rungs	6-11 rungs
max. level	1.34 m	1.86 m	2.40 m	2.92 m
Sliding extension ladder				
height adjustable from	6-10 rungs	8-14 rungs	10-18 rungs	12-22 rung
max. ladder length	3.10 m	4.20 m	5.30 m	6.40 m
Staircase ladder				
all four types can be used on	staircases or slop	pes		
Scaffold trestles				
(platform heights)	0.33 m	0.33 m	0.33 m	0.33 m
	0.61 m	0.61 m	0.61 m	0.61 m
	0.89 m	0.89 m	0.89 m	0.89 m
	1.17 m	1.17 m	1.17 m	1.17 m
			1.45 m	1,45 m
	4			1.73 m
Weight	10 kg	13 kg	16 kg	20 kg

Carrying capacity and dimensions conform to European standards specification DIN EN 131 and VBG 74. Reservations are made for technical improvement. APPROVAL D.L.I.VIC. SA 202 and other states.



This is all the space a telescopic ladder needs for



